

QRBUVSE43

21.07.2020

Emergency-stop head



General Data

Type reference:	QRBUVSE43
Description:	Emergency-stop head with lock, foolproof
Approvals:	CE
Degree of protection:	IP66
Max. storage temperature:	-50°C ... 85°C
Max. operating temperature:	-30°C ... 70°C
Mechanical life:	50.000


Technical Data

Mounting aperture:	22.3 mm
Tightening torque (mounting nut):	max. 2.5 Nm
Release:	key release
Mounting position:	any
Standards:	EN 60947-5-1, EN 60947-5-5, EN ISO 13850

Note

- with switching position indicator
- yellow anti-lock collar (dia. 44mm)
- foolproof acc. to EN ISO 13850

Dimensional drawing

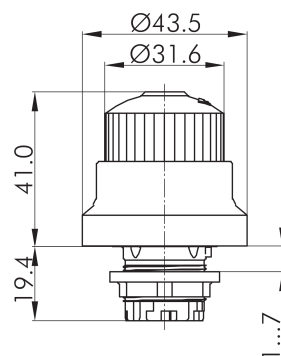

Drilling pattern

