

RV

24.01.2022

Mushroom head, latch-type



General Data

Type reference:	RV
Description:	Emergency-stop head
Approvals:	CCC, cULus, TÜV_SÜD, CE, UKCA
Degree of protection:	IP65
Max. storage temperature:	-50°C ... 85°C
Max. operating temperature:	-30°C ... 70°C
Mechanical life:	50,000

Technical data

Mounting aperture:	22.3 mm
Tightening torque (mounting nut):	max. 2.5 Nm
Release:	twist release, right
Mounting position:	any
Standards:	EN 60947-5-1, EN 60947-5-5, EN ISO 13850


Note

- must be mounted on yellow background (e.g. using the yellow, self-adhesive Schlegel nameplates ref. NAS...)

Data acc. to UL 60947-5-1/ CSA-C22.2 No. 60947-5-1

NEMA TYPE: 4 indoor/outdoor

Dimensional drawing

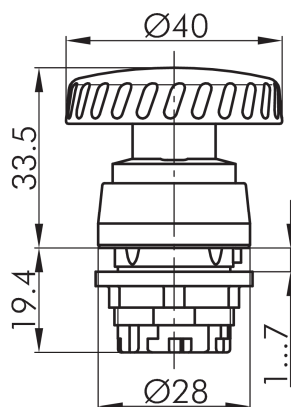

Drilling pattern

