

Datasheet

→ **RKVLB** 


10/31/2024



Technical Data

Emergency-stop head with illuminating and labelling option

<i>Series</i>	OKTRON®-R
<i>Rubric</i>	Emergency stop button

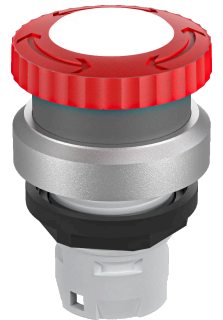

→ General Data

<i>Illumination</i>	Yes
<i>Protection class</i>	IP65
<i>Approvals</i>	CCC, CE, UKCA
<i>Operating temperature</i>	-30 ... 70 °C
<i>Storage temperature</i>	-50 ... 85 °C
<i>Mounting position</i>	any
<i>Mounting aperture</i>	Ø 16.2 mm
<i>Front frame color</i>	anthracite
<i>Actuator color</i>	red

→ Mechanical Data


<i>Tightening torque (fastening nut)</i>	max. 1.5 Nm
<i>Mechanical life</i>	10,000 Switching cycles
<i>Operating travel</i>	3 mm
<i>Unlocking</i>	Rotary release left/right

→ **Note**

- foolproof acc. to EN ISO 13850
- must be mounted on a yellow background (e.g. Schlegel adhesive labels NAS...)
- with blank nameplate

Technical Drawings

→ Dimensional drawing

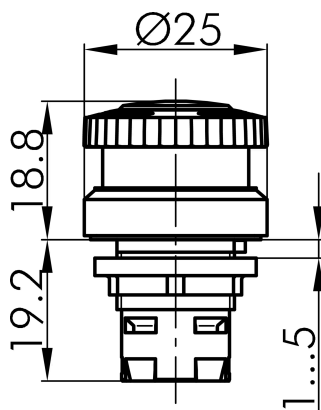

→ Cutout dimensions

